


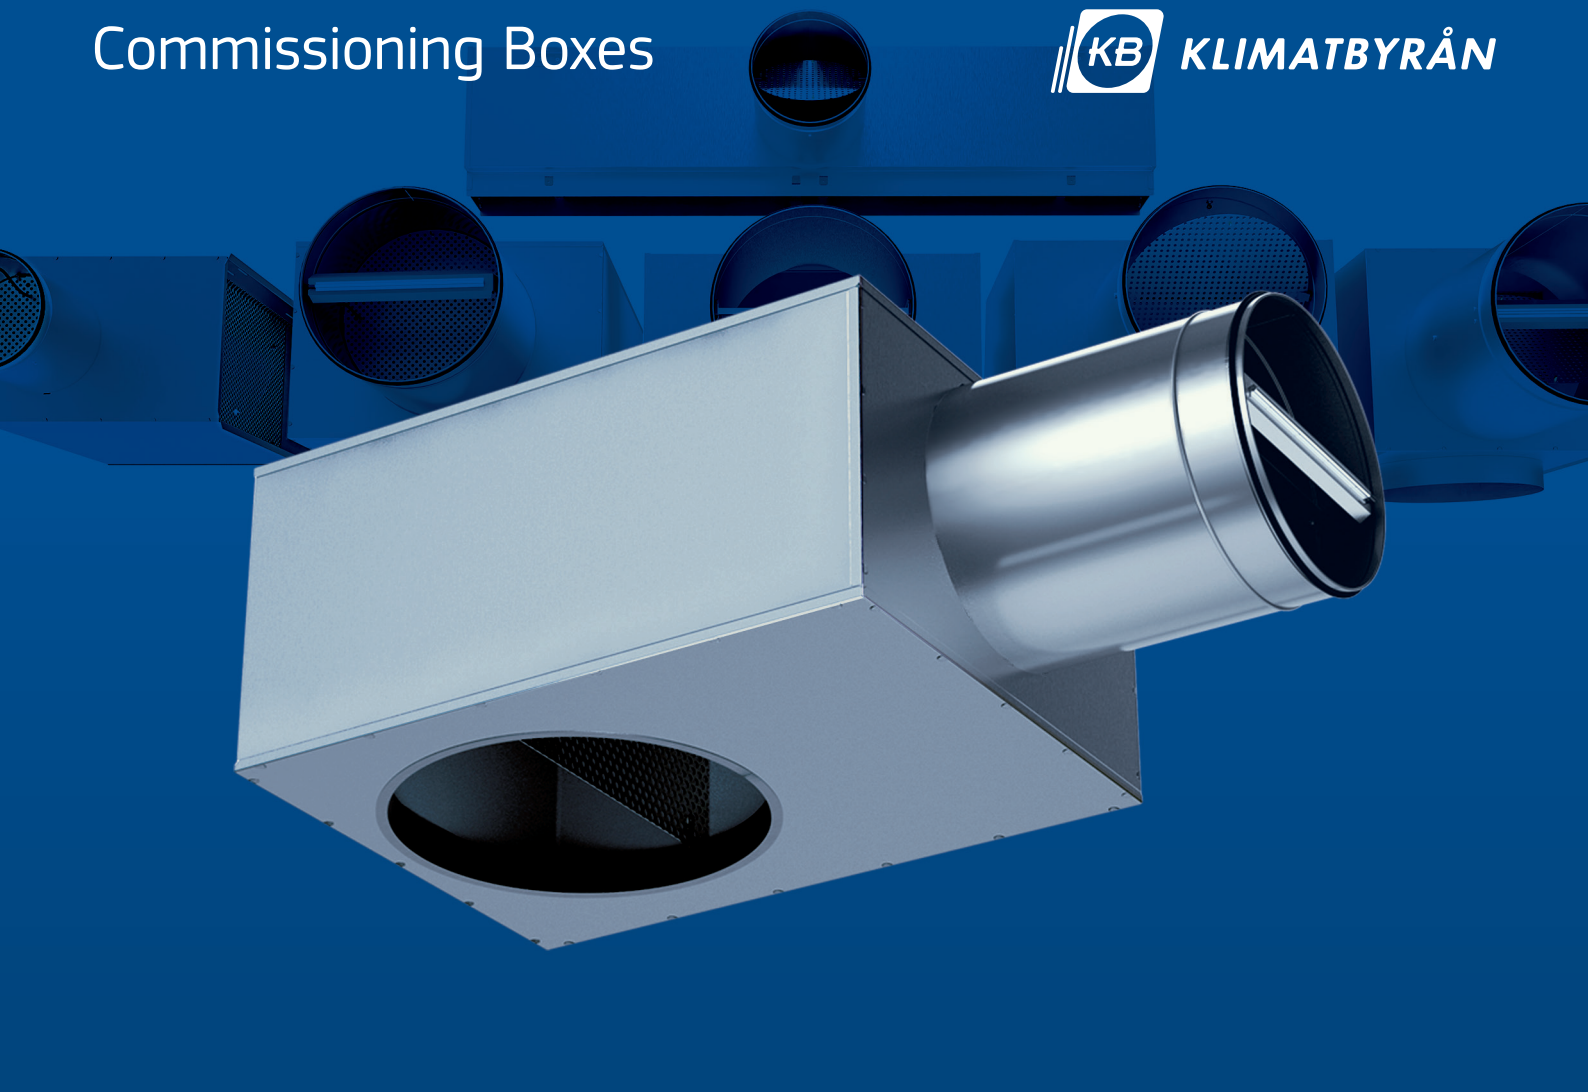

Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019

Owner of the declaration

KB Klimatbyrå AB

Program holder and publisher

The Norwegian EPD foundation

Issue date

2025-03-28

Product name

Commissioning Boxes

Declaration number

NEPD-9468-9144-EN

Valid to

2030-03-28

Declared unit

1 pc.

Registration Number

NEPD-9468-9144-EN

ver-150425

Product category /PCR

CEN Standard EN 15804:2012+A2:2019
serves as core PCR NPCR 030:2021
Part B for ventilation components

Contents

General information	3	LCA: Results	8
About Klimatbyrå	4	System boundaries	8
Product development	4	Core environmental impact indicators	8
Manufacturing	4	Resource use	9
Operations	4	End of life – Waste	9
Solutions	4	End of life – Output flow	9
Klimatbyrå Commissioning Boxes	5	Information describing the biogenic carbon content at the factory gate	9
Reference product – TK-250-200	5	Additional requirements	10
LCA: Calculation rules	6	Greenhouse gas emission from the use of electricity in the manufacturing phase	10
System boundary	6	Additional environmental impact indicators required in NPCR Part A for construction products	10
LCA: Scenarios and additional technical information	7	Dangerous substances	10
Transport from production place to assembly/user (A4)	7	Indoor environment	10
Transport to waste processing (C2)	7	Included products and multiplication factors	10
Benefits and loads beyond the system boundaries (D)	7	Bibliography	12

General information

Product

Commissioning Boxes (represented by TK-250-200).

Program holder

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 23 08 80 00
E-mail: post@epd-norge.no

Declaration Number

NEPD-9468-9144-EN

This declaration is based on Product Category Rules

CEN Standard EN 15804:2012+A2:2019 serves as core
PCR NPCR 030:2021 Part B for ventilation components

Statements

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

Declared unit

1 pc. **TK-250-200**

Declared unit with option

A1-A3, A4 A5, C1, C2, C3, C4, D

Functional unit

Not relevant. Use phase not included.

Verification

Independent verification of the declaration and data, according to ISO14025:2010

☐ Internal ☒ External

Owner of the declaration

KB Klimatbyrån AB
Travbanegatan 6, 211 41 Malmö, Sweden
E-mail: info@klimatbyran.se

Manufacturer

Airvent Légtechnikai Zrt
6000 Kecskemét, Belsőnyír 150, Hungary
E-mail: avkecskemet@airvent.hu

Place of production

Airvent Légtechnikai Zrt
6000 Kecskemét, Belsőnyír 150, Hungary

Management system

ISO 9001, ISO 14001 and ISO 50001

Organisation No.

556478-8428

Issue date

2025-03-28

Valid to

2030-03-28

Year of study

2023-2024

Comparability


EPD's of construction products may not be comparable if they are not in compliance with EN 15804 and if the comparison is not made within a construction context.

The EPD has been worked out by

Kaspars Zudrags, BM Certification SIA

Silvia Vilčeková, SILCERT Ltd
Independent verifier approved by EPD Norway

Approved



Manager of EPD Norway


About Klimatbyrån

We develop and supply ventilation products and demand-controlled air management systems, prioritizing air quality, performance and energy efficiency.



Product development

– 40 years of knowledge enables us to create indoor climate solutions, built to last and to meet future conditions.




Manufacturing

– Continuous improvement governs our production by prioritizing recyclability and sustainable material choices.



Operations

– Environmental awareness is an integral part of our operations, from warehousing and sales to final delivery.



Solutions

– The core of our solutions is to provide a healthy and energy-saving indoor climate for all facility types and user needs.

Product development

Klimatbyrån governs over four decades of accumulated knowledge within indoor climate. Our heritage drives our commitment to provide functional and sustainable air technology solutions. Our average products feature a life cycle of 25 years. This affects our choices and strategies as they have an impact on both current and future generations. Continuous improvement and adaptation of our solutions is a must to meet our customers' needs and expectations in the best possible way.

Manufacturing

A key focus in both our product development and manufacturing plant is the increased use of sustainable methods, materials and processes without compromising on quality. By prioritizing environmentally friendly resources and transitioning to new components made from recycled raw materials, we strive to ensure that our production aims for reduced environmental impact and increased recyclability and reusability.

Operations

At Klimatbyrån, energy efficiency is at the core of all our operations. From transport and sales to warehouse management and delivery practices. All our branches are powered with renewable energy from Swedish hydro power and we offset all CO₂ emissions generated from our business travel and domestic transportation. In addition, all transports from our EU based production plant are made by intermodal transport, with over 70 % of the land route being made by rail. With over a hundred trucks shipped annually, this significantly reduces our carbon footprint across Europe.


Solutions

Our goal is to supply durable, high-quality ventilation products, designed and manufactured with care, that improves indoor comfort and air quality of the building. Demand-controlled systems, that supply and regulate air distribution, have become a central key in the indoor-climate industry. Our solutions manage and secure a healthy indoor climate and improved energy efficiency, taking both facility operations, occupant needs and seasonal conditions into account.

Klimatbyrån commissioning boxes



Reference product
TK-250-200

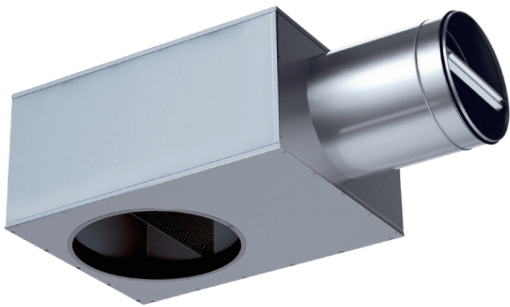

Product description

Our commissioning boxes are primarily manufactured from galvanized steel and are available in various sizes and forms, tailored to different applications. The production methods and materials across these commissioning boxes are largely consistent. This EPD provides an average environmental performance for our product range, as outlined below in the table **Included products and multiplication factors**.

The Life Cycle Assessment (LCA) is based on data specific to the representative product, TK-250-200. While TK is our most common commissioning box, the 250-200 size represents the average sales volume within the product group. Its typical material composition and production impact make it a reliable basis for assessing the environmental performance of the entire commissioning box product family.

TK-250-200 – Product specification

Materials	kg	%
Steel	5.06	94.4
Polyethylene terephthalate	0.30	5.6
TOTAL	5.36	
Packaging – corrugated board	0.62	

Standard sizes

1-step	2-step
TK-125-100	TK-160-100
TK-160-125	TK-200-125
TK-200-160	TK-250-160
TK-250-200	TK-315-200
TK-315-250	TK-400-250
TK-400-315	

Airflow range
50 – 2520 m³/h (14 - 700 l/s)

Materials
Casing, distribution plate and flanged spigot from galvanized sheet steel with EPDM rubber gasket. Washable surface coated insulation from 100% recycled, non-allergenic, hydrophobic PET material. Damper module of galvanized steel with cords of polyester. Measurement device of galvanized steel and aluminum pipe with silicone hose.

Market
Europe

Reference service life
> 25 years

Description and function

TK is a compact commissioning box for airflow regulation with supply air diffusers. The product is designed for ceiling installation and ideal for flush mounting in suspended (false) ceilings due to its low construction height. The low build height is possible by the internal socket design of the diffuser connection.

The TK features a supply air distribution plate and a removable damper module for commissioning and measuring of the airflow. The damper module is equipped with a measuring flange with hoses for precise measurement of the airflow and the damper blade is fitted with adjustment cords for easier commissioning and for securing the damper to the commissioned airflow.

The damper module is removable which enables easy access when cleaning the air ducts. When the product is installed according to requirements, the cords also allow for simplified cleaning during service intervals and provides an efficient safety measure when resetting the damper to its commissioned setting after maintenance.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Energy sources of the electricity used in manufacturing processes of module A3 are modeled using the mix of electricity, the average 0,456kg CO₂ eq./kWh. A4: Transport scenarios include EURO 6 truck transport for 307 km, sea ferry 158 km, train 747 km. A5. The energy consumption of A5 and C1 model is considered negligible and module A5 includes only packaging utilization. C1: No loads in C1 have been generated as manual dismantling. C2: Transport to waste treatment site after dismantling using EURO 6 truck average (100 km assumed). C3: Assumed as 90% of commissioning box is recycling. C4: Assumed as 10% of commissioning box materials are goes to the landfill. D: Modeled as 90% of commissioning box is recycling.

Transport from production place to assembly/user (A4)

Type	Capacity utilisation (incl. return) [%]	Type of vehicle	Distance KM	Fuel/Energy consumption	Value [l/t]
Truck	36.7	lorry 16-32 metric ton, EURO6	307	0.043	13.20
Railway	50	rail	747	0.002	1.49
Boat	50	ship	158	0.030	4.74

Assembly (A5)

	Unit	Value
Packaging cardboard, recycled – 89%	kg	0.55
Packaging cardboard, landfill – 5.5%	m³	0.03
Packaging cardboard, incineration – 5.5%	kWh	0.03

End of Life (C1, C3, C4)

	Unit	Value
Treatment of waste reinforcement steel, recycling	kg	4.55
Treatment of waste plastic, municipal incineration	kg	0.30
Treatment of scrap steel, landfill	kg	0.51

Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) [%]	Type of vehicle	Distance KM	Fuel/Energy consumption	Value [l/t]
Truck	36.7	Lorry 16-32 metric ton, EURO5	100	0.043	13.20

Benefits and loads beyond the system boundaries (D)

	Unit	Value
Substitution of steel production	kg	4.55
Substitution of paper production	kg	0.55
Substitution of heat production	MJ	8.29
Substitution of thermal energy production	MJ	1.45

LCA: Results

System boundaries

X=included, MID=module not declared, MIR=module not relevant

Product stage			Assembly stage		Use stage							End of life stage				Beyond system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MID	MID	MID	MID	MID	MID	MID	X	X	X	X	X

Core environmental impact indicators

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ -eq.	2.24E+01	7.12E-01	9.51E-01	0.00E+00	5.77E-02	9.96E-01	3.16E-03	-7.61E+00
GWP-fossil	kg CO ₂ -eq.	2.33E+01	7.11E-01	2.08E-02	0.00E+00	5.76E-02	9.96E-01	3.16E-03	-7.72E+00
GWP-biogenic	kg CO ₂ -eq.	-8.56E-01	1.54E-04	8.56E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.03E-01
GWP-lulAC	kg CO ₂ -eq.	4.36E-02	3.64E-04	1.49E-05	0.00E+00	2.58E-05	3.29E-05	1.80E-06	-1.42E-03
ODP	kg CFC11-eq.	4.80E-06	1.15E-08	1.83E-10	0.00E+00	8.51E-10	4.54E-09	9.14E-11	-3.17E-08
AP	mol H ⁺ eq.	5.08E-01	6.26E-03	1.02E-04	0.00E+00	1.97E-04	2.72E-03	2.24E-05	-3.56E-02
EP-freshwater	kg N eq.	2.32E-03	8.14E-06	4.36E-06	0.00E+00	4.49E-06	1.02E-05	2.59E-07	-3.75E-03
EP-marine	kg N eq.	3.50E-02	1.86E-03	8.77E-05	0.00E+00	6.46E-05	1.28E-03	8.53E-06	-7.46E-03
EP-terrestrial	mol N eq.	2.01E+00	2.05E-02	3.05E-04	0.00E+00	7.03E-04	1.38E-02	9.32E-05	-8.15E-02
POCP	kg NMVOC eq.	8.74E-02	6.43E-03	1.18E-04	0.00E+00	2.90E-04	4.07E-03	3.34E-05	-2.75E-02
ADP-minerals & metals*	kg Sb eq.	1.36E-03	1.90E-06	1.49E-07	0.00E+00	1.61E-07	1.49E-07	5.01E-09	-7.48E-05
ADP-fossil*	MJ	3.10E+02	9.44E+00	2.15E-01	0.00E+00	8.37E-01	3.79E+00	7.75E-02	-7.88E+01
WDP*	m ³	1.04E+01	5.92E-02	5.39E-03	0.00E+00	4.13E-03	5.61E-02	2.23E-04	-1.35E+00

GWP-total: Global Warming Potential; GWP-fossil: Global Warming Potential fossil fuels; GWP-biogenic: Global Warming Potential biogenic; GWP-LULUC: Global Warming Potential land use and land use change; ODP: Depletion potential of the stratospheric ozone layer; AP: Acidification potential, Accumulated Exceedance; EP-freshwater: Eutrophication potential, fraction of nutrients reaching freshwater end compartment; See "additional requirements" for indicator given as PO4 eq. EP-marine: Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-terrestrial: Eutrophication potential, Accumulated Exceedance; POCP: Formation potential of tropospheric ozone; ADP-M&M: Abiotic depletion potential for non-fossil resources (minerals and metals); ADP-fossil: Abiotic depletion potential for fossil resources; WDP: Water deprivation potential, deprivation weighted water consumption.

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

Resource use

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
RPEE	MJ	2.52E+01	2.37E-01	-9.98E+00	0.00E+00	1.15E-02	2.86E-02	7.48E-04	-9.29E+00
RPEM	MJ	8.46E+00	0.00E+00	-8.46E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.00E-02
TPE	MJ	3.36E+01	2.37E-01	-1.84E+01	0.00E+00	1.15E-02	2.86E-02	7.48E-04	-9.25E+00
NRPE	MJ	3.04E+02	9.44E+00	2.15E-01	0.00E+00	8.37E-01	-7.12E+00	7.75E-02	-8.97E+01
NRPM	MJ	6.92E+00	0.00E+00	-2.60E-02	0.00E+00	0.00E+00	-6.89E+00	0.00E+00	1.09E+01
TRPE	MJ	3.11E+02	9.44E+00	1.89E-01	0.00E+00	8.37E-01	-1.40E+01	7.75E-02	-7.88E+01
SM	kg	1.90E+00	7.15E-03	3.49E-04	0.00E+00	3.56E-04	1.66E-03	1.95E-05	4.26E+00
RSF	MJ	6.41E-02	4.59E-05	1.97E-06	0.00E+00	4.52E-06	7.81E-06	4.03E-07	-6.37E-04
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
W	m³	2.46E-01	1.53E-03	-1.97E-05	0.00E+00	1.24E-04	9.70E-04	8.05E-05	-2.25E-02

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

End of life – waste

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HW	kg	6.59E+00	2.37E-02	2.27E-03	0.00E+00	1.42E-03	1.63E-02	8.56E-05	-2.59E+00
NHW	kg	5.31E+01	4.31E-01	2.46E-01	0.00E+00	2.62E-02	3.87E-01	1.96E-03	-2.13E+01
RW	kg	6.40E-04	4.08E-06	1.59E-07	0.00E+00	1.81E-07	4.62E-07	1.21E-08	4.94E-05

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

End of life – output flow

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
CR	kg	0.00E+00	0.00E+00	5.52E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR	kg	7.09E-01	0.00E+00	3.41E-02	0.00E+00	0.00E+00	4.55E+00	0.00E+00	0.00E+00
MER	kg	0.00E+00	0.00E+00	3.51E-01	0.00E+00	0.00E+00	3.00E-01	0.00E+00	0.00E+00
EEE	MJ	0.00E+00	0.00E+00	5.30E-02	0.00E+00	0.00E+00	1.40E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	2.98E-01	0.00E+00	0.00E+00	7.90E+00	0.00E+00	0.00E+00

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Information describing the biogenic carbon content at the factory gate

Biogenic carbon content	Unit	Value
Biogenic carbon content in product	kg C	0
Biogenic carbon content in the accompanying packaging	kg C	0,93

Additional requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity production, hard coal	ecoinvent 3.10.1	1.1	g CO ₂ eq./kWh
Electricity production, nuclear, pressure water reactor	ecoinvent 3.10.1	0.0071	g CO ₂ eq./kWh
Electricity production, photovoltaic	ecoinvent 3.10.1	0.0833	g CO ₂ eq./kWh
Electricity production, hydro, run-of-river	ecoinvent 3.10.1	0.0044	g CO ₂ eq./kWh

Additional environmental impact indicators required in NPCR Part A for construction products

In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-IOBC	kg CO2 eq.	2.33E+01	7.11E-01	2.08E-02	0.00E+00	5.77E-02	9.96E-01	3.16E-03	-7.72E+00

GWP-IOBC Global warming potential calculated according to the principle of instantaneous oxidation.

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list

Indoor environment

The product meets the requirements for low emissions.

Included products and multiplication factors

The multiplication factors in the table below can be used to scale LCA data for another product or size.

Name	Factor	Name	Factor	Name	Factor	Name	Factor
AL		FK		RDS		TKN	
AL-100.....	0,41	FK-200-160.....	0,72	RDS-1-500.....	0,38	TKN-200-125.....	0,63
		FK-250-200.....	1,02	RDS-2-500.....	0,47	TKN-250-160.....	0,88
BRL-B		FK-315-250.....	1,44	RDS-3-500.....	0,60	TKN-250-200.....	1,01
BRL-B-100.....	0,52	FK-400-315.....	2,11	RDS-4-500.....	0,79		
BRL-B-125.....	0,63			RDS-1-1000.....	0,71	TLM	
BRL-B-160.....	0,82	FLM		RDS-2-1000.....	0,87	TLM-100-100.....	0,25
BRL-B-200.....	1,01	FLM-100-100.....	0,25	RDS-3-1000.....	1,08	TLM-125-125.....	0,33
BRL-B-250.....	1,25	FLM-125-125.....	0,33	RDS-4-1000.....	1,46	TLM-160-125.....	0,44
		FLM-160-125.....	0,44	RDS-1-1250.....	0,93	TLM-160-160.....	0,51
BRL-S		FLM-160-160.....	0,51	RDS-2-1250.....	1,05	TLM-200-160.....	0,57
BRL-S-100.....	0,62	FLM-200-160.....	0,57	RDS-3-1250.....	1,29	TLM-200-200.....	0,66
BRL-S-125.....	0,76	FLM-200-200.....	0,66	RDS-4-1250.....	1,73	TLM-250-200.....	0,87
BRL-S-160.....	1,04	FLM-250-200.....	0,87	RDS-1-1500.....	0,97	TLM-250-250.....	1,04
BRL-S-200.....	1,39	FLM-250-250.....	1,04	RDS-2-1500.....	1,33	TLM-315-250.....	1,19
BRL-S-250.....	1,60	FLM-315-250.....	1,19	RDS-3-1500.....	1,66	TLM-315-315.....	1,44
		FLM-315-315.....	1,44	RDS-4-1500.....	2,09	TLM-400-400.....	1,99
		FLM-400-400.....	1,99	RDS-1-2000.....	1,31		
DLKR-B		FLKR-B		RDS-2-2000.....	1,69	TLS	
DLKR-B-200x100.....	0,43	FLKR-B-200x100.....	0,43	RDS-3-2000.....	2,07	TLS-125-400.....	0,61
DLKR-B-300x100.....	0,74	FLKR-B-300x100.....	0,81	RDS-4-2000.....	2,58	TLS-160-400.....	0,68
DLKR-B-400x100.....	0,77	FLKR-B-400x100.....	0,79			TLS-200-500.....	1,01
DLKR-B-600x100.....	1,07	FLKR-B-500x100.....	1,27	TK		TLS-200-595.....	1,29
DLKR-B-300x150.....	0,80	FLKR-B-600x100.....	1,48	TK-125-100.....	0,37	TLS-250-595.....	1,46
DLKR-B-400x150.....	1,13	FLKR-B-300x150.....	0,81	TK-160-125.....	0,52	TLS-315-595.....	1,68
DLKR-B-500x150.....	1,45	FLKR-B-400x150.....	1,12	TK-200-160.....	0,73		
DLKR-B-600x150.....	1,62	FLKR-B-500x150.....	1,28				
DLKR-B-400x200.....	1,21	FLKR-B-600x150.....	1,46	TK-250-200.....	1,00		
DLKR-B-500x200.....	1,56	FLKR-B-400x200.....	1,35	TK-315-250.....	1,46		
DLKR-B-600x200.....	1,73	FLKR-B-500x200.....	1,56	TK-400-315.....	2,16		
		FLKR-B-600x200.....	1,75	TK-160-100.....	0,47		
		FLKR-B-600x300.....	2,77	TK-200-125.....	0,63		
DLKR-S		FLKR-S		TK-250-160.....	0,88		
DLKR-S-200x100.....	0,44	FLKR-S-200x100.....	0,45	TK-315-200.....	1,27		
DLKR-S-300x100.....	0,80	FLKR-S-300x100.....	0,67	TK-400-250.....	1,87		
DLKR-S-400x100.....	0,79	FLKR-S-400x100.....	0,8				
DLKR-S-500x100.....	1,10	FLKR-S-500x100.....	1,08				
DLKR-S-600x100.....	1,21	FLKR-S-600x100.....	1,6				
DLKR-S-300x150.....	0,80	FLKR-S-300x150.....	0,91				
DLKR-S-400x150.....	1,19	FLKR-S-400x150.....	1,14				
DLKR-S-500x150.....	1,30	FLKR-S-500x150.....	1,36				
DLKR-S-600x150.....	1,46	FLKR-S-600x150.....	1,48				
DLKR-S-400x200.....	1,15	FLKR-S-400x200.....	1,38				
DLKR-S-500x200.....	1,73	FLKR-S-500x200.....	1,58				
DLKR-S-600x200.....	1,76	FLKR-S-600x200.....	1,78				
		FLKR-S-600x300.....	2,78				

Bibliography

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations – Principles and procedures

ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines

EN 15804:2012+A2:2019 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.

NPCR Part A Construction products and services. Ver. 2.0. March 2021, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 March 2022, EPD-Norge.

LCA background report 2025-01-08.

 Global Program Operator	Program Operator		
	The Norwegian EPD Foundation	tel	+47 23 08 80 00
	Post Box 5250 Majorstuen, 0303 Oslo	e-mail	post@epd-norge.no
	Norway	web	www.epd-norge.no
	Publisher		
	The Norwegian EPD Foundation	tel	+47 23 08 80 00
	Post Box 5250 Majorstuen, 0303 Oslo	e-mail	post@epd-norge.no
	Norway	web	www.epd-norge.no
	Owner of the declaration		
	KB Klimatbyrå AB	tel	+46 (0)40-671 27 50
	Travbanegatan 6, SE-211 41 Malmö.	e-mail	info@klimatbyran.se
	Sweden	web	www.klimatbyran.se
	Author of the life cycle assessment		
	K. Zudrags	tel	+371 67772135
	BM Certification SIA	e-mail	info@bmcertification.com
	Latvia	web	www.bmcertification.com
	ECO Platform		
	ECO Platform	web	www.eco-platform.org
	ECO Portal	web	ECO Portal

EPD for the best environmental decision

