



Beteckning: BDEB-15-bbb


Beskrivning: Böj 15 grader, hane/hane

Material: Förzinkad stålplåt Z275


Godkänd i täthetsklass D (EN 12237)

Typgodkännande: RISE 1718/88

Pressad

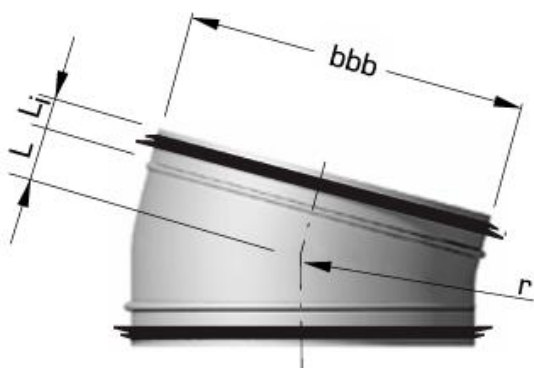

Segmentbyggd

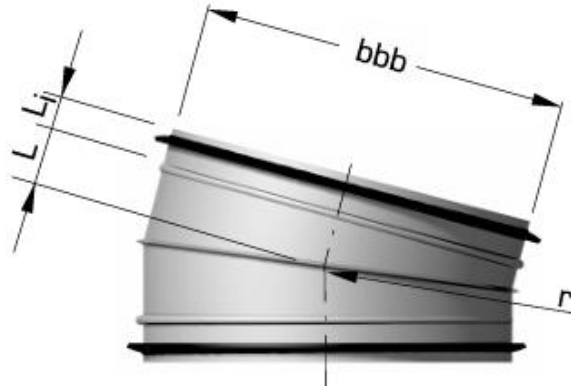

BDEB-15-bbb	bbb [mm]	L [mm]	R [mm]	Li [mm]	Vikt [Kg]	Modell
008	80	15	100	35	0,11	Pressad
010	100	15	100	35	0,14	Pressad
012	125	15	125	35	0.19	Pressad
016	160	15	160	35	0.26	Pressad
020	200	15	200	35	0.42	Pressad
025	250	44	250	35	0.60	Segmentbyggd
031	315	60	315	35	1.00	Segmentbyggd
040	400	55	400	60	1.80	Segmentbyggd
050	500	70	500	60	2.40	Segmentbyggd
063	630	85	630	60	3.40	Segmentbyggd
080	800	110	800	95	6.20	Segmentbyggd